

HLS™9000 Quick-Fit Handle Set Installation Instructions



A Phillips screwdriver is required.


A Quick-Fit Connection™ release tool (for removing handles if necessary), is provided in the hardware package.

Use water and a soft cloth to clean. Do not use brass cleaner or solvent-based cleaning agents, as they will damage the protective coating on the hardware.


Note: Handles and backplates vary by style but application is the same.

1. Apply the Backplate Gasket to the inside of each Backplate. Push Gaskets firmly into place to ensure a tight seal. Snap a Nylon Bushing into the handle hole of each Backplate.
2. Attach Interior and Exterior Backplates to door and fasten loosely with the M5 Phillips Head Backplate Screws provided. Note: The screw heads must be on the interior side of the door.
3. If the handles are handed, determine which one is the Exterior Handle. Push Shaft into Exterior Handle until it stops.

4. Holding Exterior Handle in the proper horizontal position, insert the handle with shaft attached through the Backplate and door gear handle hole, until handle is firmly seated against the Nylon Bushing.
5. While holding Exterior Handle in place, slide Interior Handle onto Shaft and press both handles together until secure and tight to Backplates.
6. Insert the Key/Knob Cylinder or Thumbturn Insert from the interior side of the door until cylinder body is flush with Backplate.
7. Install the Cylinder Screw through the screw hole below the deadbolt in the edge of the door to secure in place.
8. Hand-tighten Backplate Screws. Note: If handles seem loose after tightening Backplates, push handles together again until tight.

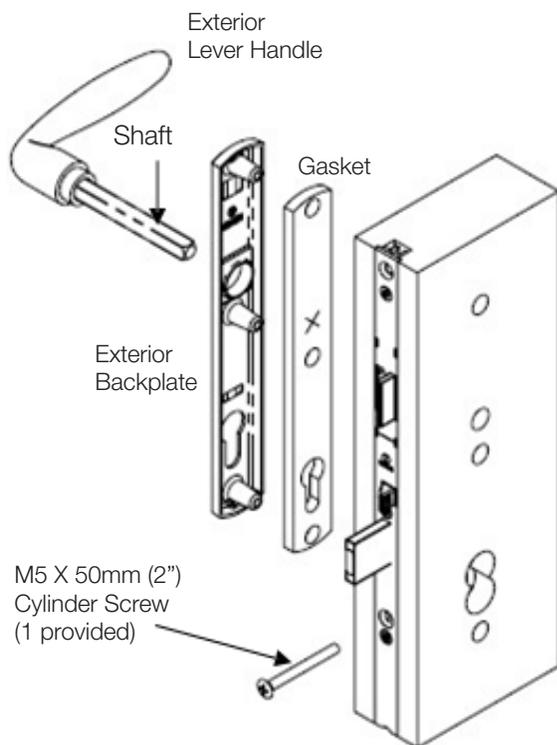

M5 X 50mm (2")
Cylinder Screw
(1 provided)

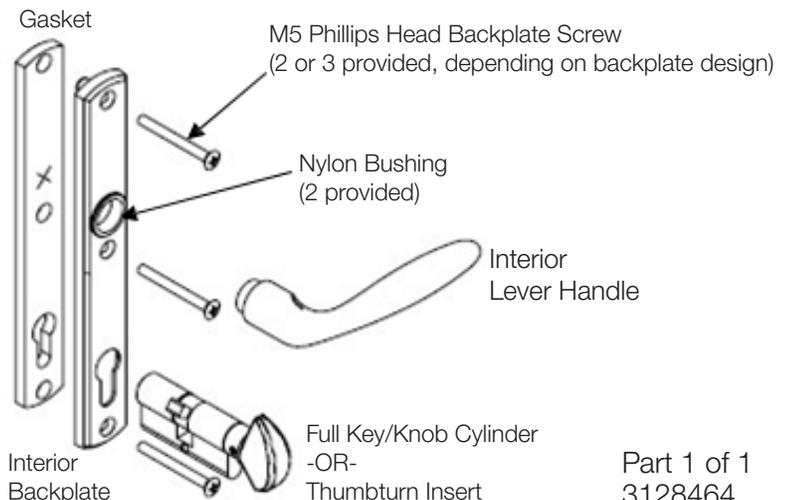

To Use The Quick-Fit Connection™ Release Tool:

1. Place chamfered end of tool into hole on the side for the handle neck.
2. Push tool in, and rotate towards the lever part of the handles.
3. Pull handle off the shaft and backplate.